
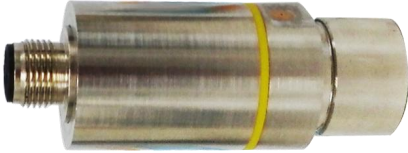


<p>PB1170 Compact Pressure Sensor M12 socket Connection: Internal thread G1/4 Analogue output Sensing range 0...600bar 0...8700Psi 0...612 kgf/cm2</p>	 <p>CE RoHS</p>
<p>Applications</p>	<p>Pressure: corresponding pressure Liquid and gas</p>
<p>Supply voltage[V]</p>	<p>18...36DC</p>
<p>Reverse polarity protection</p>	<p>Yes</p>
<p>Voltage drop[V]</p>	<p><2</p>
<p>Current consumption[mA]</p>	<p><30</p>
<p>Overloading Pressure[bar]</p>	<p>880</p>
<p>Burst pressure[bar]</p>	<p>880</p>
<p>Analogue output</p>	<p>0...10V</p>
<p>Analogue output load[Ohm]</p>	<p>4...20 mA : Max (Ub-10V) x 50 / 0...10V : Min 2000</p>
<p>Consumption</p>	<p>0.72W Max</p>
<p>Final value measured[%]</p>	<p>< ±1</p>
<p>Measuring Accuracy[%]</p>	<p>±1</p>
<p>Output response time[ms]</p>	<p>3</p>
<p>Ambient temperature [°C/°F]</p>	<p>-25...80/-13...176</p>
<p>Medium temperature [°C/°F]</p>	<p>-25...80/-13...176</p>
<p>Storage temperature[°C/°F]</p>	<p>-40...100/-40...212</p>
<p>Protection/Enclosure Rating</p>	<p>IP68</p>
<p>Insulation resistance[MΩ]</p>	<p>> 100(500 V DC)</p>
<p>Dimension[mm]</p>	 <p>Technical drawing showing dimensions and specifications: Total height: 71.20 mm Height to top of sensor: 28.40 mm Height to top of connector: 17.50 mm Height to bottom of connector: 14.00 mm Connector thread: M12*P1.0 Main body diameter: Ø26 Sensor diameter: A24 Internal thread diameter: Ø21 Internal thread: G1/4</p>
<p>ESD EN61000-4-2</p>	<p>4kV (Level 2)</p>
<p>EFT EN61000-4-4</p>	<p>2kV (Level 3)</p>
<p>Walkie talkie experiment[mm]</p>	<p><10</p>
<p>Shock resistance[g]</p>	<p>50</p>

Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	V2A(1.4305)/Ceramic/FPM(Viton)/Probe:Stainless steel 316L
Connection	M12 socket
Wiring Core color	

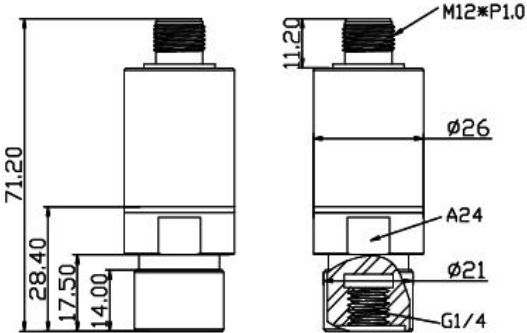

ema electronics

website: www.ema-electronic.com

e-mail: sales@ema-electronic.com