
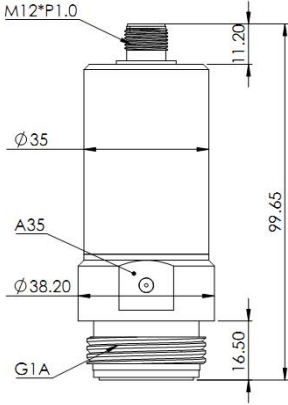


<p>PB3304 Sanitary Pressure Sensor M12 socket Connection: G1"A 4...20mA Sensing range -1...20bar -14...290Psi -1...20 kgf/cm2</p>	 <p>CE RoHS FDA</p>
<p>Applications</p>	<p>Negative pressure: corresponding pressure Liquid and gas</p>
<p>Supply voltage[V]</p>	<p>18...36DC</p>
<p>Reverse polarity protection</p>	<p>Yes</p>
<p>Voltage drop[V]</p>	<p><2</p>
<p>Current consumption[mA]</p>	<p><30</p>
<p>Overloading Pressure[bar]</p>	<p>35</p>
<p>Burst pressure[bar]</p>	<p>50</p>
<p>Analogue output</p>	<p>4...20mA</p>
<p>Analogue output load[Ohm]</p>	<p>4...20 mA : Max (Ub-10V) x 50 / 0...10V : Min 2000</p>
<p>Consumption</p>	<p>0.72W Max</p>
<p>Final value measured[%]</p>	<p>< ±1</p>
<p>Measuring Accuracy[%]</p>	<p>±1</p>
<p>Analogue output response time[ms]</p>	<p>3</p>
<p>Ambient temperature [°C/°F]</p>	<p>-25...80/-13...176</p>
<p>Medium temperature [°C/°F](1.5h)</p>	<p>-25...125/-13...257 (150°C/1.5h)</p>
<p>Storage temperature[°C/°F]</p>	<p>-40...100/-40...212</p>
<p>Protection/Enclosure Rating</p>	<p>IP69K*</p>
<p>Insulation resistance[MΩ]</p>	<p>> 100(500 V DC)</p>
<p>Dimension[mm]</p>	
<p>ESD EN61000-4-2</p>	<p>4kV (II)</p>
<p>EFT EN61000-4-4</p>	<p>2kV (III)</p>
<p>Walkie talkie experiment[mm]</p>	<p><10</p>
<p>Shock resistance[g]</p>	<p>50</p>

Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	V2A(1.4305)/Ceramic/FPM(Viton)/Probe:Stainless steel 316L
Connection	M12 socket
Wiring Core color	
Note*	equipped with a sanitary adapter to IP69



ema electronics

website: www.ema-electronic.com

e-mail: sales@ema-electronic.com