
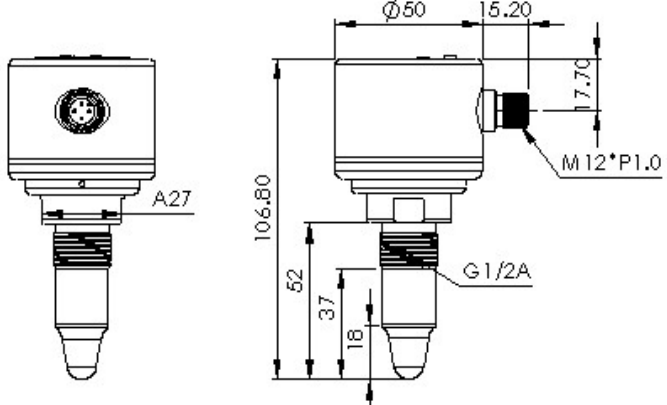


<p>LC0002</p> <p>High-Frequency Level Switch</p> <p>RELAY output</p> <p>Smart type</p> <p>G1/2"A thread</p> <p>M12*1.0 socket</p> <p>Auto-learning function</p> <p>For powder,liquid,sticky liquid</p>	
<p>Application</p>	<p>Powder,liquid, suitable for sticky liquid</p>
<p>Display</p>	<p>Power indicator: green LED , Status indicator: red LED</p>
<p>Operating voltage[V]</p>	<p>18...36DC</p>
<p>Switch response time[s]</p>	<p><1</p>
<p>Maximum power consumption[W]</p>	<p>< 2W</p>
<p>Output</p>	<p>RELAY</p>
<p>Relay Output load</p>	<p>36V(DC)/1A</p>
<p>NO/NC setting</p>	<p>Yes</p>
<p>Learning switching point function</p>	<p>Yes</p>
<p>Medium temperature[°C/°F]</p>	<p>-40...+120/-40...+248</p>
<p>environment temperature[°C/°F]</p>	<p>-40...+85/-40...+185</p>
<p>Operating pressure[bar]</p>	<p>Max. 40 bar</p>
<p>Thread connection</p>	<p>G1/2"A</p>
<p>Measuring length[mm]</p>	<p>52</p>
<p>Connection</p>	<p>M12 socket</p>
<p>Housing material</p>	<p>Stainless steel 316L</p>
<p>Probe material</p>	<p>PEEK</p>
<p>Probe material/Wetted Parts</p>	<p>IP68/IP69K*</p>
<p rowspan="3">EMC</p>	<p>ESD 6KV III</p>
<p>EFT 2KV III</p>	
<p>Surge immunity test 500V I</p>	
<p>Walkie talking experiment[mm]</p>	<p>< 5</p>
<p>Dimension[mm]</p>	

<p>Panel and M12 Connection</p>	
<p>Drawing</p>	
<p>Note*</p>	<p>Use sanitary adapter to upgrade to IP69K (Optional accessory)</p>



ema electronics

website: www.ema-electronic.com

e-mail: sales@ema-electronic.com