



Diffuse reflection

PD-H42Y

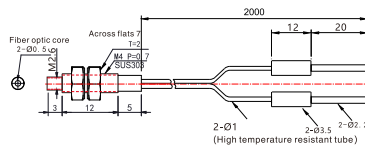


Size: M4
 Max. temperature: 105°C
 Sensing distance: 160mm
 (Sensing distance varies with different amplifiers)

PD-H62Y

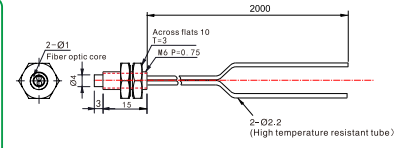


Size: M6
 Max. temperature: 105°C
 Sensing distance: 230mm
 (Sensing distance varies with different amplifiers)

PD-H41E/H42E

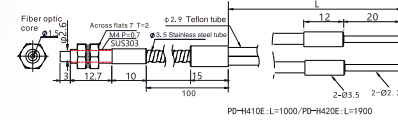


Size: M4
 Max. temperature: 200°C
 Sensing distance:
 PC1:350mm
 PG1:150mm

PD-H61E/H62E

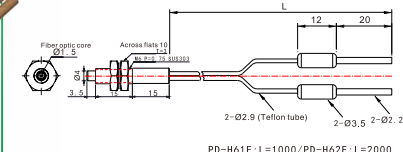

Size: M6
 Max. temperature: 200°C
 Sensing distance: 190mm/180mm
 (Sensing distance varies with different amplifiers)



PD-H41S/H42S

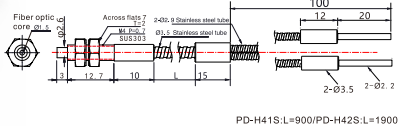

Size: M4
 Max. temperature: 350°C

Sensing distance:
 PC1:300mm
 PG1:150mm

PD-H61S/H62S

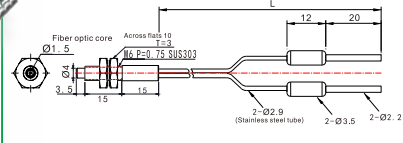

Size: M6
 Max. temperature: 350°C
 Sensing distance: 190mm/180mm
 Sensing distance:
 PG1:150mm

Guidance

Fiber amplifiers

- Standard economical
- High stability
- High performance type
- High speed response
- Color sensor


Fiber components

- Popular type
- Array-type
- Flat bracket type
- Side-view type
- High elastic type
- High temperature resistant
- Small spot type
- Combination type
- High end type

Fiber lens

- Fiber lens


PT-H42Y

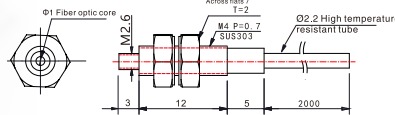

Size: M4
 Max. temperature: 105°C



Sensing distance:
 PC1:2300mm
 PG1:700mm

PT-H41E/H42E



Size: M4
 Max. temperature: 200°C
 Sensing distance: 450mm/390mm
 (Sensing distance varies with different amplifiers)

PT-H41S/H42S

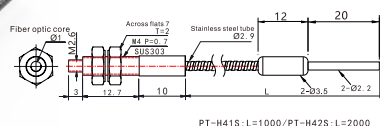

Size: M4
 Max. temperature: 350°C

Sensing distance:
 PC1:1500mm
 PG1:600mm

Thru-beam

*PG1: TEGA with a threshold setting of 200;
 PC1: 7-step with a threshold setting of 200.
 *Cable length listed above can be customized.