
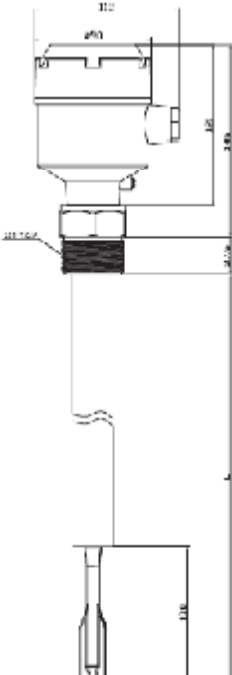
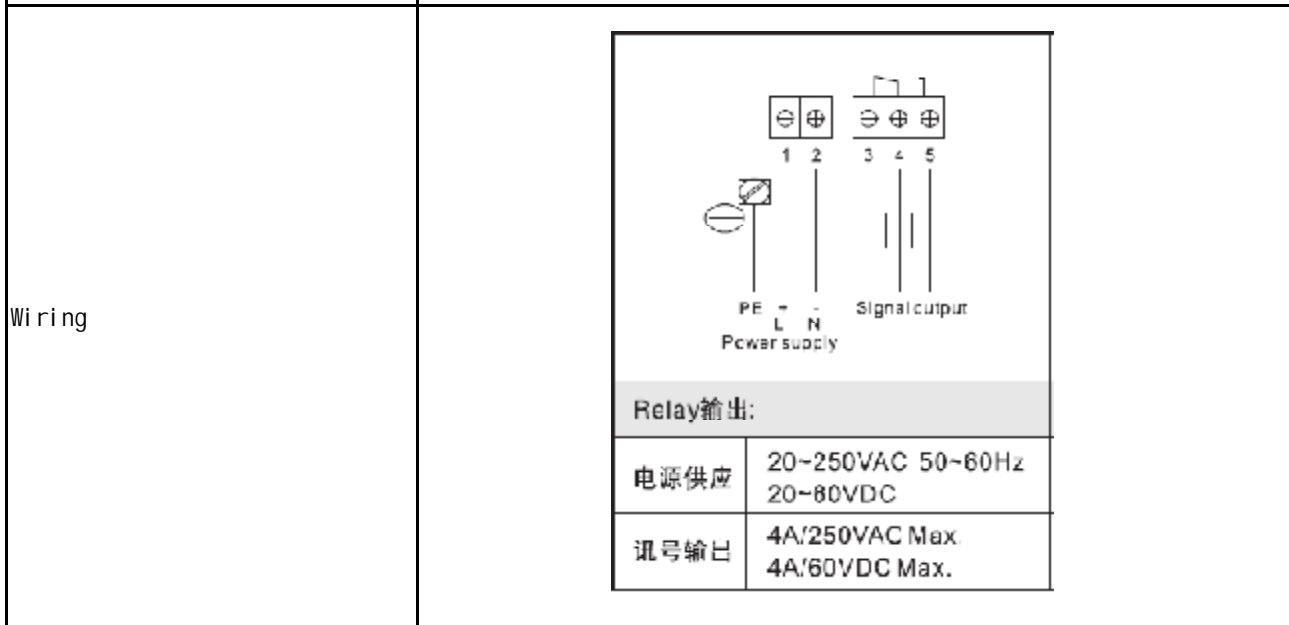
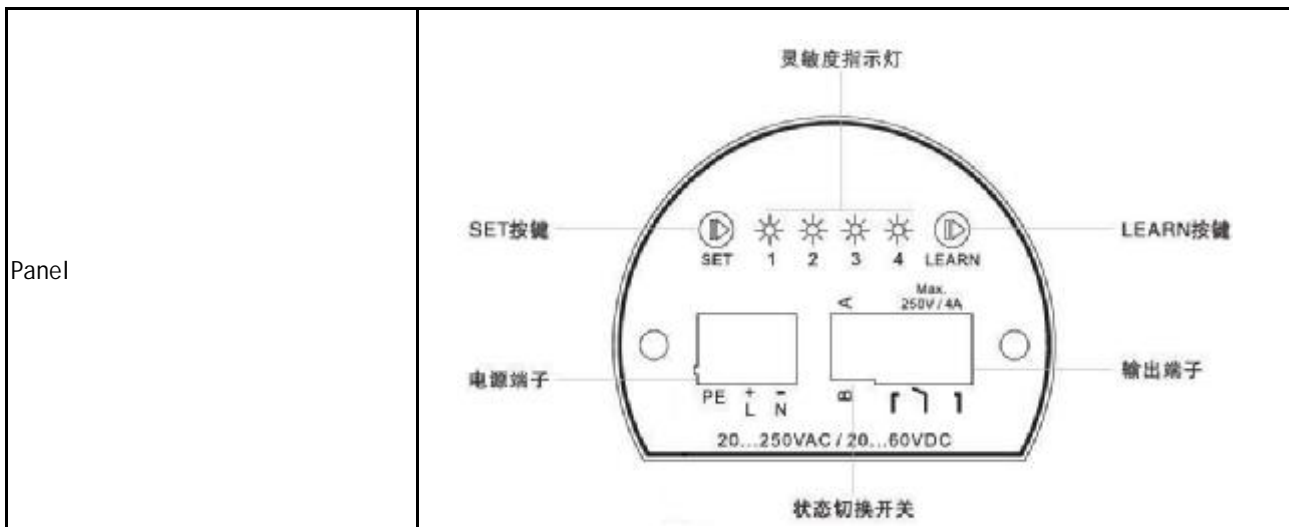




<p>VRE11AA</p> <p>extension vibrating fork level</p> <p>Relay output</p> <p>G1-1/2A thread</p> <p>Flange or insert can be installed</p> <p>Outlet specification: M20*P1.5</p> <p>Response time: &lt;3s</p>	
Display	4×Red LED
Supply voltage[V]	20... 60VDC 20... 250VAC 50/60Hz
Vibration frequency[Hz]	300...340
Response time[S]	<3
Max. power consumption[W]	3 (DC power supply)
	15 (AC power supply)
Output	Relay
NPN/PNP Output maximum load[mA]	AC250V/4A, DC60V/4A
Applications	Particle / liquid / powder
Ambient Temperature[°C/°F]	-40... +70
Operating pressure[bar]	-1... 40
Connection	G1-1/2"A insert, flange
Probe length[mm]	L=200/400/600/800/1000/1200
Connection	M20*1.5
Housing material	Aluminum alloy
Probe material/Wetted parts	Stainless steel 316L
Protection	IP65
EMC	ESD 6KV
	EFT 2KV
Dimensions[mm]	



ema electronics

website: [www.ema-electronic.com](http://www.ema-electronic.com)

e-mail: [enquiry@ema-electronic.com](mailto:enquiry@ema-electronic.com)