

Product introduction

Description



Standard



High-temperature

Sanitary pressure transmitter

Sanitary pressure transmitter, designed for food and pharmaceutical industry, is suitable for CIP/SIP cleaning and sterilization. Smart compact design, the welded process diaphragm medium parts is made of high quality stainless steel 316L, roughness $\leq 0.4\mu\text{m}$, filling fluid with hygiene standard in line with FDA certification, variety of international standard process connections are available.

Main parameters

Pressure types	Gauge pressure
Measuring range	10kPa-3MPa, please refer to the ordering information chapter
Output signal	4-20mA, 4-20mA+HART, 0.5-4.5VDC, Modbus-RTU/RS485, customer
Reference accuracy	$\pm 0.2\%$ URL, $\pm 0.5\%$ URL, customer

Field of application

Pressure, level

Approvals



Measuring medium

Viscous, paste-like, adhesive, crystallising, particulates containing and contaminated media

Technical specifications

Measuring range and limit

Nominal value	Smallest calibratable span	Lower range limit (LRL)	Upper range limit (URL)	Overpressure limit*
40kPa	10kPa	-40kPa	40kPa	1MPa
250kPa	25kPa	-100kPa	250kPa	4MPa
1MPa	100kPa	-100kPa	1MPa	6MPa
3MPa	300kPa	-100kPa	3MPa	15MPa

The unit of the measuring range above can be converted into kg/cm², MPa and kPa. Provide other measuring range according to requirements. Adjust requirements: lower range value (LRV) and upper range value (URV) can be adjusted within the scope of the upper and lower range limit, minimum measuring range ≤ |URV - LRV| ≤ maximum measuring range.

*Limit value of overpressure: depends on the pressure value of the parts with lowest pressure capacity

Standard specifications and reference conditions

Test standard: GB/T28474 / IEC60770; Zero based-calibration span, Linear output, Silicone oil filling, 316L stainless steel isolation diaphragm.

Power supply effects

Zero and span change should not be more than ± 0.005% URL/V when power supply changes in 10.5/16.5-55VDC

Performance specifications

The overall performance including but not limited to 【reference accuracy】 , 【environment temperature effects】 and other comprehensive error

Typical accuracy: ±0.2URL

Stability: ±0.2% URL/ year

Loading effects

Zero and span change should not be more than ± 0.05% URL/kΩ

Reference accuracy

Including linearity, hysteresis and repeatability. calibration temperature: 20°C±5°C

Linear output accuracy	Typical	±0.2%URL	Nominal value: 40kPa 250kPa、1MPa 3MPa
	Max value	±0.5%URL	

Vibration effects

Vibration resistance	According to IEC60068-2-6 , 10g RMS (25-2000HZ)
Impact resistance	According to IEC60068-2-27 , 500g/1ms

Ambient temperature effects(Typical)

Within the range - 20-80 °C total impact ±0.2%URL/10k

Output signal

Signal	Type	Output
4-20mA	Linearity	Two wire
4-20mA+HART	Linearity	Two wire
0.5-4.5VDC	Linearity	Three wire
Modbus-RTU/RS485	Linearity	Four wire

Technical specifications
Insulation resistance
 $\geq 20M \Omega @, 100VDC$
Damping time

Total damping time constant: equal to the sum of damping time of amplifier and sensor capsule

Damping time of amplifier : 0-100S adjustable

 Diaphragm capsule (isolation sensor diaphragm and silicon oil filling) damping time: $\leq 0.2S$

 Startup after power off : $\leq 3S$ (with HART communication: $\leq 0.2S$)

 Normal services after data recovery : $\leq 4S$ (with HART communication: $\leq 31S$)

Environment condition

Items	Operational condition
Working temperature	-40-85°C
Storage temperature	-40-100°C
Media temperature	Sanitary fluid filling sensor : -10-125°C; with heat exchange connector: -10-250°C*
	Silicon oil filling: -40-120°C, with heat exchange connector : -40-300°C*
Working humidity	0-95%RH
Protection class	IP67
Dangerous condition	ExialICT4(GYB13.1139X)**
*Using heat exchange connector may lead to zero offset and temperature drift. The degree depends on mounting position and filling fluid	
**Please contact the engineer for further information	

Technical Specifications

Signal output	4-20mA	4-20mA+HART*	0.5-4.5VDC	0.5-4.5VDC(ratiometric output)	RS485
Power supply voltage	10-30VDC	10.5/16.5-55VDC	6-30VDC	5VDC	5VDC/9-30VDC
Electric current	$\leq 20.8mA$		$\leq 3.5mA$		$\leq 7mA$
Load resistance(Ω)	$<(U-10)/0.0208$	$<(U-10.5)/0.0208^{**}$	$\geq 5k$, recommend 100k		/
Transmission distance	$<1000m$		$<5m$		$<1200m$
Power consumption	$\leq 500mW(20.8mA \text{ output}@24VDC)$		$\leq 17.5mW(0.5-4.5VDC \text{ output,}@5VDC)$		$\leq 168mW(RS485 \text{ output}@24VDC)$
*For this output type, the load resistance value in communication is 250 Ω					
**The load resistance value 0-2119 Ω is in nominal working condition, 250-600 Ω is HART communication					

Technical specifications
EMC environment(not RS485 signal output)

NO.	Test items	Basic standards	Test conditions	Performance level
1	Radiated interference	GB/T 9254/CISPR22	30MHz-1000MHz	OK
2	Conducted interference (DC power port)	GB/T 9254/CISPR22	0.15MHz-30MHz	OK
3	Electrostatic discharge immunity test (ESD)	GB/T 17626.2/IEC61000-4-2	4kV(Contact),8kV(Air)	B(Note2)
4	Immunity to radio frequency EM-fields	GB/T 17626.3/IEC61000-4-3	10V/m(80MHz-1GHz)	A(Note1)
5	Power frequency magnetic field Immunity test	GB/T 17626.8/IEC61000-4-8	30A/m	A(Note1)
6	Electrical fast transient / Burst Immunity Test	GB/T 17626.4/IEC61000-4-4	2kV(5/50ns,100kHz)	B(Note2)
7	Surge immunity requirements	GB/T 17626.5/IEC61000-4-5	1kV(Line to line) 2kV(Line to ground) (1.2us/50us)	B(Note2)
8	Immunity to conducted disturbances induced by radio frequency fields	GB/T 17626.6/IEC61000-4-6	3V(150kHz-80MHz)	A(Note1)

(Note 1)Performance level A: The performance within the limits of normal technical specifications.

(Note 2)Performance level B: Temporary reduction or loss of functionality or performance, it can restore itself. The actual operating conditions, storage and data will not be changed.

Product selection instruction

Sensor select instruction

Code	Nominal value	Description
S403G	40kPa	Range -40kPa-40kPa, smallest calibratable span 10kPa
S254G	250kPa	Range -100kPa-250kPa, smallest calibratable span 25kPa
S105G	1MPa	Range -100kPa-1MPa, smallest calibratable span 100kPa
S305G	3MPa	Range -100kPa-3MPa, smallest calibratable span 300kPa

Adjust requirements: lower range value (LRV) and upper range value (URV) can be adjusted within the scope of the upper and lower range limit, minimum measuring range $\leq |URV - LRV| \leq$ maximum measuring range

Code	Position	Instruction
S	Diaphragm material	SUS316L
H		Hastelloy C
S	Isolation fluid filling	Sillicon Oil, process temperature: -45-205°C
F		Neobee M-20, process temperature: -10-180°C
F	Sensor Seal	Stainless steel welding seal

Electrical connection


Code	Description
H1	Aviation plug, M12*1(4 pin), IP67

M12*1(4 pin), Aviation plug (H1)



Electrical connection


Air plug, M12*1, 4 pin(H1)

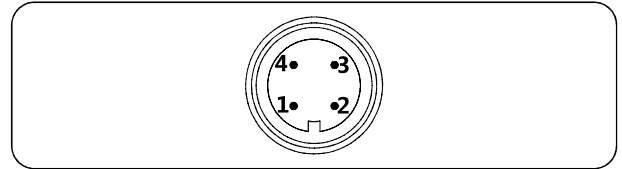

Label	Two wires	Three wires	Four wires	Modbus-RTU/RS485
1	Power+	Power+	Power+	Power+
2			Signal-	B-
3	Key-z	Signal+	Signal+	A+
4	Power-	Power-	Power-	Power-


Electrical connection accessory

Aviation plug straighter(J1)

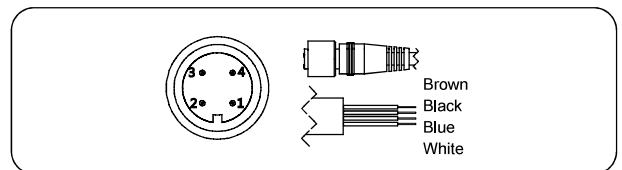

label	Two wires	Three wires	Four wires	Modbus-TRU/RS485
1/Brown	Power+	Power+	Power+	Power+
2/White			Power-	B-
3/Blue	Key-z	Signal+	Signal+	A+
4/Black	Power-	Power-	Power-	Power-


Aviation plug elbow (J2)

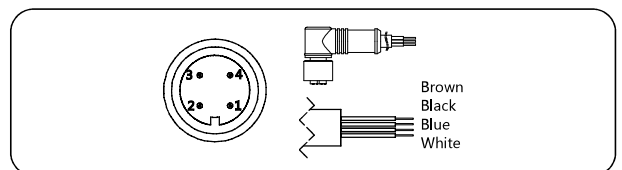

label	Two wires	Three wires	Four wires	Modbus-TRU/RS485
1/Brown	Power+	Power+	Power+	Power+
2/White			Signal-	B-
3/Blue	Key-z	Signal+	Signal+	A+
4/Black	Power-	Power-	Power-	Power-


Product selection instruction

Air plug straighter(J4)

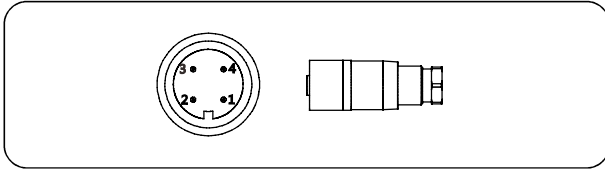

label	Two wires	Three wires	Four wires	Modbus-TRU/RS485
1	Power+	Power+	Power+	Power+
2			Signal-	B-
3	Key-z	Signal+	Signal+	A+
4	Power-	Power-	Power-	Power-

Aviation plug elbow(J5)

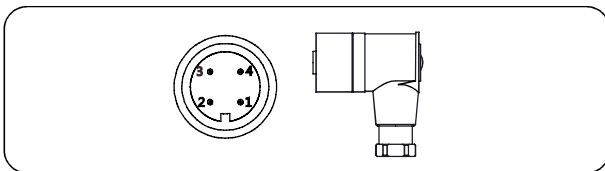


label	Two wires	Three wires	Four wires	Modbus-TRU/RS485
1	Power+	Power+	Power+	Power+
2			Signal-	B-
3	Key-z	Signal+	Signal+	A+
4	Power-	Power-	Power-	Power-

Transmission module

Code	Description
F	4-20mA two wire, power supply: 10-30VDC
H	4-20mA+HART two wire, power supply: 16.5-55VDC
R	Modbus-RTU/RS485 5V/9-30VDC
5	0.5-4.5VDC three wire, power supply: 6-30VDC
6	0.5-4.5VDC three wire, proportional output power supply: 5VDC
A	4-20mA two wire, intrinsic safety, power supply: 10-30VDC

Cooling element connector (HT)

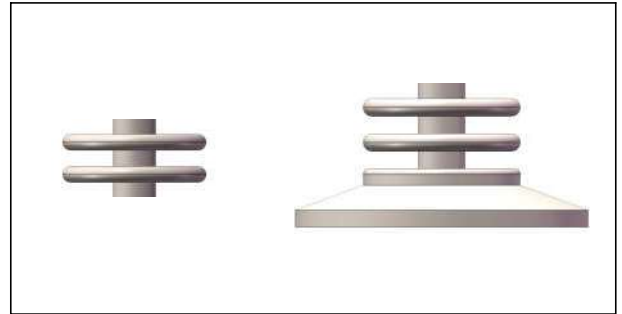


Process connection select instruction


Code	Items	Description
4	Process connector material	Stainless steel, SUS304
6		Stainless steel, SUS316
NT	Connection type	Standard connection, medium temperature: -25-85°C
HT		Cooling element connector, medium temperature: -40-150°C
F	Isolation fluid filling	Sanitary fluid filling, Neobee M-20, process temperature: -10-180°C
S		Silicon oil filling, process temperature: -45-205°C
S	Isolation diaphragm material	SUS316L
H		Hastelloy C
K01	Process connection specifications	Tri-Clamp 1-1/2"
K02		Tri-Clamp 2"
K03		DIN32676 DN32
K04		DIN32676 DN40
K05		DIN32676 DN50
K06		ISO2852 DN38
K07		ISO2852 DN40
K08		ISO2852 DN51
K09		DIN11851 DN25
K10		DIN11851 DN40
K11		DIN11851 DN50
K12		SMS DN1-1/2"
K13		SMS DN2"
K14		IDF DN1-1/2"
K15		IDF DN2"
K18	DRD	
K20	Plug in tube flush sanitary clamp	

Product drawing and dimension

Standard drawing and dimension with aviation plug (H1) (unit:mm)

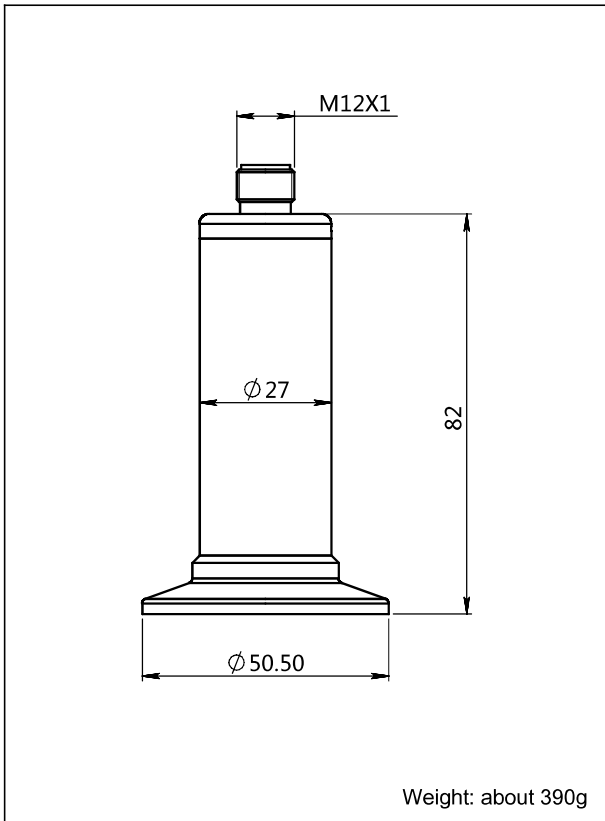


High-temperature drawing and dimension with aviation plug (H1) (unit:mm)

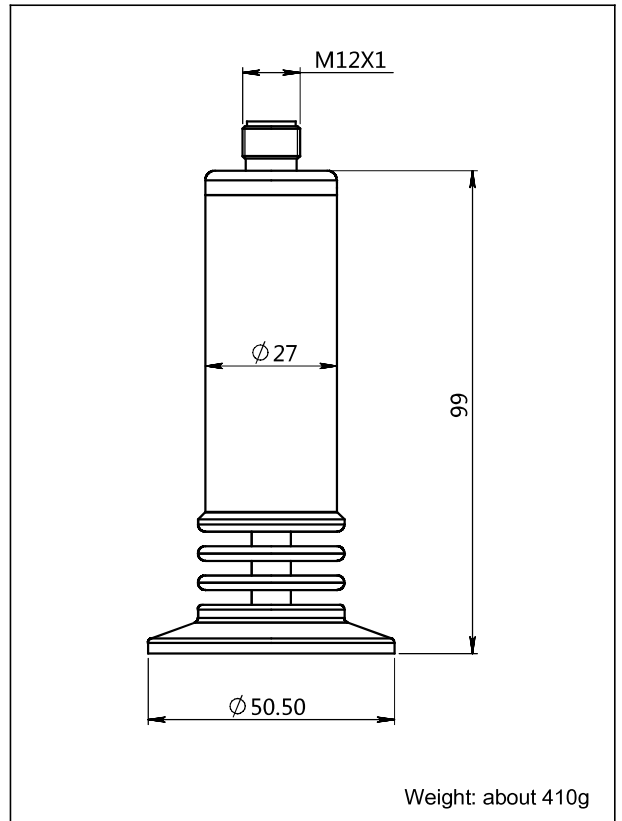


Product drawing and dimension

Process connection (K01-K08)(unit: mm)

Installation Sketches




Dimension




Standard	Specification	Size(ΦD)	Diaphragm size(ΦM)
Tri-Clamp	1-1/2"	50.5	31
Tri-Clamp	2"	64	42
DIN32676	DN32	50.5	31
DIN32676	DN40	50.5	31
DIN32676	DN50	64	42
ISO2852	DN38	50.5	31
ISO2852	DN40	64	42
ISO2852	DN51	64	42

Process connection (K09-K11)(unit: mm)

Installation Sketches




Dimension




Standard	Specification	Size(G)	Diaphragm siz(ΦM)
DIN11851	DN25	Rd 52*1/6	20
DIN11851	DN40	Rd 65*1/6	31
DIN11851	DN50	Rd 78*1/6	42

Process connection (K12-K13)(unit: mm)

Installation Sketches




Dimension




Standard	Specification	Size(G)	Diaphragm size(ΦM)
SMS	1-1/2"	Rd 60*1/6	31
SMS	2"	Rd 70*1/6	42

Process connection (K14-K15)(unit: mm)

Installation Sketches



Dimension





Standard	Specification	Size(G)	Diaphragm size(ΦM)
IDF	1-1/2"	IDF 1-1/2"	31
IDF	2"	IDF 2"	42

Disclaimer: all the data used in the product description is not legally binding. Relevant technical details may be changed due to further improve



Product drawing and dimension

Process connection (K18) (unit: mm)

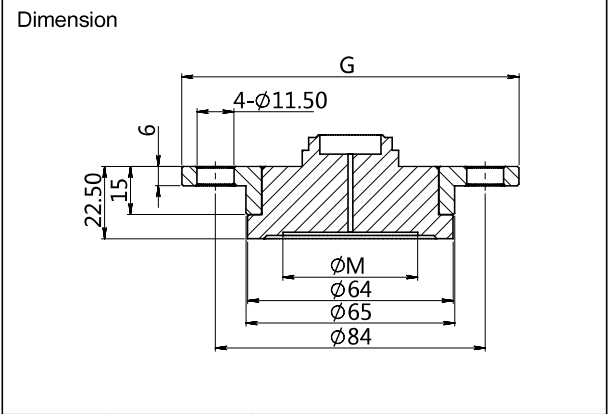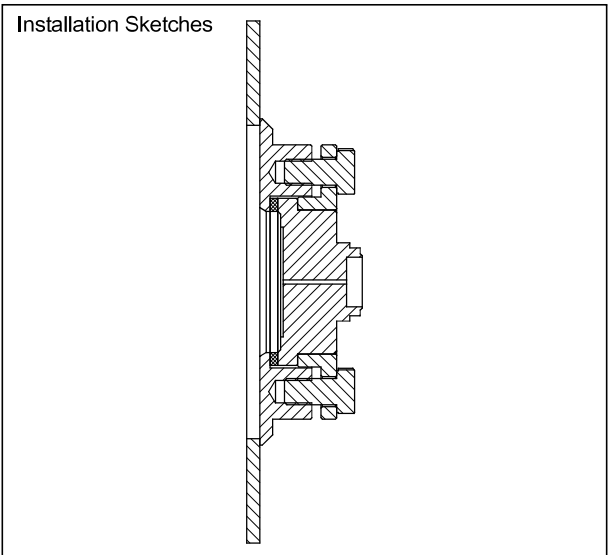

Standard	Specification	Size(G)	Diaphragm size(ΦM)
DRD	DN50	105	42


Process connection (K20) (unit: mm)

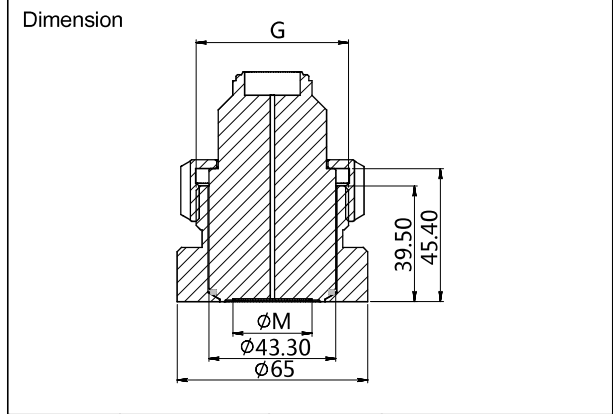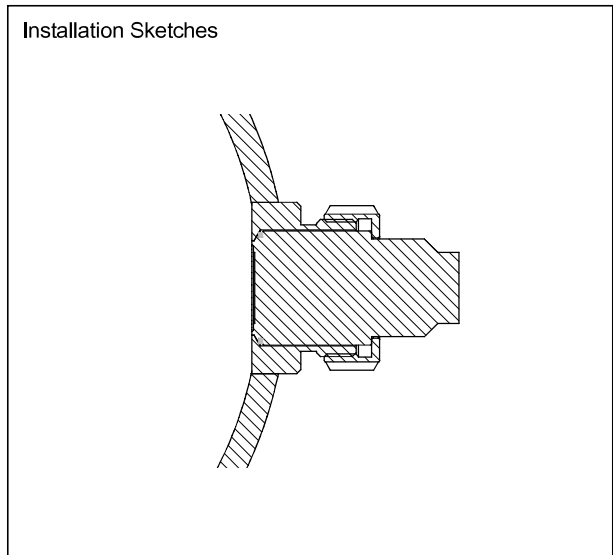

Standard	Specification	Size(G)	Diaphragm size(ΦM)
Normal	Standard	Rd 52*1/6	27


Product drawing and dimension

Tri-Clamp (G1-G2) (unit: mm)

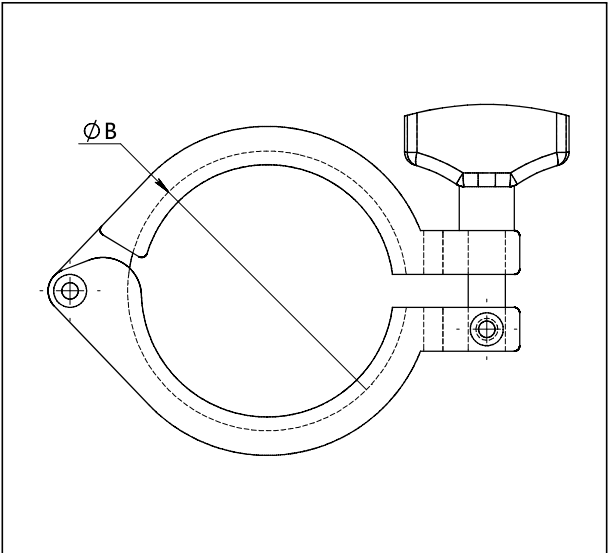


Standard	Specification	Size(ΦB)
Tri-Clamp	1-1/2"	53.9
Tri-Clamp	2"	67.4

Seal ring (M1-M2) (unit: mm)

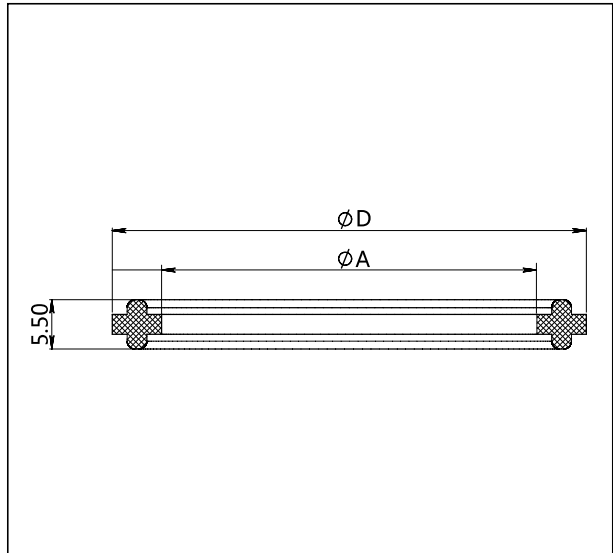

Standard	Specification	Size(ΦD)	Size(ΦA)
Tri-Clamp	1-1/2"	50.5	35
Tri-Clamp	2"	64	47.8

Welding adaptor(Z1-Z1)(unit:mm)

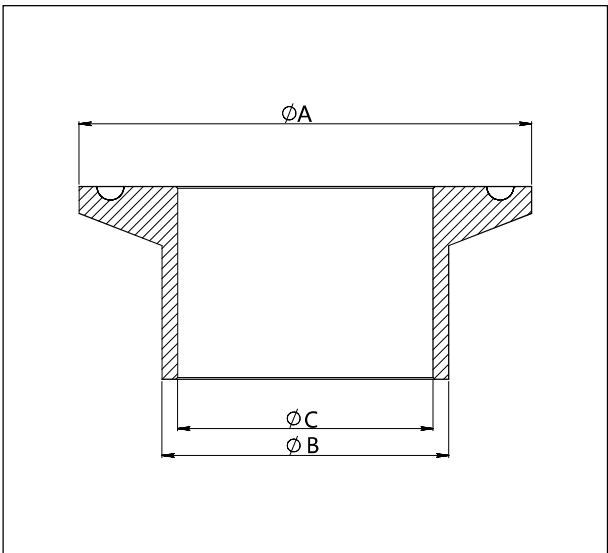

Standard	Specification	Size(ΦA)	Size(ΦB)	Size(ΦC)
Tri-Clamp	1-1/2"	50.5	38	35.6
Tri-Clamp	2"	64	51	48.6

Disclaimer: all the data used in the product description is not legally binding. Relevant technical details may be changed due to further improve

Ordering information chapter

Item	Parameters	Code	Instruction	(*) Fast delivery available
	Model	SMP858-TSH	Monosilicon gauge pressure transmitter	
Sensor	Separator	-	Detailed specifications as following	
	Pressure range code	S403G	Nominal value(URL): 40kPa(gauge pressure)	*
		S254G	Nominal value(URL): 250kPa(gauge pressure)	*
		S105G	Nominal value(URL): 1MPa(gauge pressure)	*
		S305G	Nominal value(URL): 3MPa(gauge pressure)	*
	Sensor seal	F	Stainless steel welding seal	
Electrical connection	Separator	-	Detailed specifications as following	
	Electrical connection	H1	Aviation plug, M12*1(4 pin), IP67	*
	Cable entry protector	R0	None	
Output	Separator	-	Detailed specifications as following	
	Output signal	F	4-20mA two wire, power supply: 10-30VDC	*
		H	4-20mA+HART two wire, power supply: 16.5-55VDC	*
		R	Modbus-RTU/RS485 5V/9-30VDC	
		5	0.5-4.5VDC three wire, power supply: 6-30VDC	
		6	0.5-4.5VDC three wire, ratiometric output, power supply: 5VDC	
		A	4-20mA two wire, intrinsic safety, power supply: 10-30VDC	
Body tube	Separator	-	Detailed specifications as following	
	Tube	65	Stainless steel tube length: 65mm (HART, Modbus-TRU/RS485 is not available)	*
		85	Stainless steel tube length: 85mm (with HART, Modbus-TRU/RS485)	
Process connection	Separator	-	Detailed specifications as following	
	Process connector material	4	Stainless steel, SUS304	*
		6	Stainless steel, SUS316	
	Connection type	NT	Standard connection, medium temperature: -25-85°C	*
		HT	Cooling element connector, medium temperature: -40-150°C	*
	Isolation fluid filling	F	Sanitary fluid filling, Neobee M-20, process temperature: -10-180°C	*
		S	Silicon oil filling, process temperature: -45-205°C	*
	Isolation diaphragm material	S	SUS316L	*
H		Hastelloy C		

Ordering information chapter

	Process connection specifications	K01	Tri-Clamp 1-1/2", max measuring range 2MPa	*
		K02	Tri-Clamp 2", max measuring range 2MPa	*
		K03	DIN32676 DN32, max measuring range 1.6MPa	
		K04	DIN32676 DN40, max measuring range 1.6MPa	
		K05	DIN32676 DN50, max measuring range 1.6MPa	
		K06	ISO2852 DN38, max measuring range 4MPa	
		K07	ISO2852 DN40, max measuring range 4MPa	
		K08	ISO2852 DN51, max measuring range 2.5MPa	
		K09	DIN11851 DN25, max measuring range 2.5MPa	
		K10	DIN11851 DN40, max measuring range 2.5MPa	
		K11	DIN11851 DN50, max measuring range 2.5MPa	
		K12	SMS DN1-1/2", max measuring range 2.5MPa	
		K13	SMS DN2", max measuring range 2.5MPa	
		K14	IDF DN1-1/2", max measuring range 2MPa	
		K15	IDF DN2", max measuring range 2MPa	
		K18	DRD, max measuring range 2.5MPa	
		K20	Plug in tube flush sanitary clamp, max measuring range 2MPa	
Additional options	Separator	-	Detailed specifications as following	
	Accessory	/G1	1.5" Tri-Clamp	*
		/G2	2" Tri-Clamp	*
		/M1	1.5" seal ring	*
		/M2	2" seal ring	*
		/Z1	Welding adaptor, Tri-Clamp1-1/2"	*
		/Z2	Welding adaptor, Tri-Clamp2"	*
	Welding accessory	/J1	Air female plug (straighter) with 2m cable, 4 pin, M12*1, IP67	
		/J2	Air female plug (elbow) with 2m cable, 4 pin, M12*1, IP67	
		/J4	Air female plug (straighter) without cable, 4 pin, M12*1, IP67	
		/J5	Air female plug (elbow) without cable, 4 pin, M12*1, IP67	
	Calibration report	/Q1	Calibration report provided by our company	*
	Approvals (multiple)	/I1	Intrinsic safety certificate, ExialICT4, NEPSI	*
		/F3	CE certificate	*

Approvals

Factory certificate

Certification organization	Intertek
Quality management system	ISO9001-2015
Scope of certification	Design and production of pressure transmitter
Registration number	110804039

CE

Licence scope	PRESSURE TRANSMITTER
Standard	EN61000-6-2 : 2005
	EN61000-6-4 : 2007
Registered number	AC/0100708

Intrinsic safety certificate

Certification organization name	NEPSI
Licenses range	SMP series pressure transmitter
Explosion-proof mark	ExiaIICT4
Ambient temperature	-25-+60°C
Medium maximum temperature	+80°C
Registration number	GYB13.1139X
Intrinsically safe parameter description	Maximum input voltage:28VDC
	Maximum input current:93mA
	Maximum input power:0.66w
	Maximum internal equivalent parametersCi(nF):0.035
	Maximum internal equivalent parametersLi(mH):≈0



scan & follow LEEG wechat



check website for more info



Shanghai LEEG Instruments Co.,Ltd

ADD: No.100 Duhui Road, Minhang District, Shanghai China
 Postcode:201109
 Tel: (86) 21-31261976
 Fax: (86) 21-31261975
 E-mail:sales@leegsensor.com info@leegsensor.com
 Web: www.leegsensor.com