JUMO GmbH & Co. KG
P.O. Box 1209
D-36039 Fulda, Germany
Telefon: +49 661 6003 321
Fax: +49 661 6003 9695
E-Mail: mail@jumo.net
Web: http://www.jumo.net

ООО «КОМТЕК», г. Санкт-Петербург
пр. Александровской Фермы,
д.29 литера ВГ, оф.218
Тел: +7 952 222 12 18
Тел: +7 995 596 01 67
E-Mail: jumo@jumo-russia.ru
Интернет: www.jumo-russia.ru

JUMO STEAMtemp

Push-in resistance thermometers in steam-tight version



- for temperatures from -70 to +200°C
- as single, twin or triple resistance thermometer
- in 2-wire, 3-wire or 4-wire circuit
- connecting cable in PTFE, FEP and silicone

Push-in resistance thermometers are preferably used for temperature measurement in sterilizers. Thanks to their special construction, they are highly suitable for application in pressurized atmospheres containing steam. Other applications include plant engineering and laboratories.

The PTFE connecting cable is suitable for use in humid areas within the temperature range -190 to +260°C, the FEP cable from -70 to +200°C. The cable connection incorporates strain relief.

The measuring insert is normally fitted with a Pt100 temperature sensor to EN 60 751, Class A in 2-wire circuit. Versions with 2 or 3 measuring circuits are also available. 3-and 4-wire circuit connections can be provided.


Technical data

Connection	cable ends available as: bare wires, with ferrules, receptacles or multipole connector.
Connecting cable	PTFE, ambient temperature -190 to +260°C FEP, ambient temperature -70 to +200°C silicone, ambient temperature -50 to +150°C connecting cable available with shielding (option)
Protection tube	stainless steel 1.4571, 4mm, 4.5mm, 6mm dia.
Measuring insert	Pt100 temperature sensor, EN 60 751, Cl. A, 2-/3-/4-wire circuit
Protection	IP69

JUMO GmbH & Co. KG
P.O. Box 1209
D-36039 Fulda, Germany
Telefon: +49 661 6003 321
Fax: +49 661 6003 9695
E-Mail: mail@jumo.net
Web: http://www.jumo.net

ООО «КОМТЕК», г. Санкт-Петербург
пр. Александровской Фермы,
д.29 литера ВГ, оф.218
Тел: +7 952 222 12 18
Тел: +7 995 596 01 67
E-Mail: jumo@jumo-russia.ru
Интернет: www.jumo-russia.ru

Dimensions



Type 902830/10
Type 902830/30


JUMO GmbH & Co. KG
P.O. Box 1209
D-36039 Fulda, Germany
Telefon: +49 661 6003 321
Fax: +49 661 6003 9695
E-Mail: mail@jumo.net
Web: http://www.jumo.net

ООО «КОМТЕК», г. Санкт-Петербург
пр. Александровской Фермы,
д.29 литера ВГ, оф.218
Тел: +7 952 222 12 18
Тел: +7 995 596 01 67
E-Mail: jumo@jumo-russia.ru
Интернет: www.jumo-russia.ru

Order details: Push-in resistance thermometers in steam-tight version

(1) Basic version

		902830/10	Push-in resistance thermometer, steam-tight
		902830/30	Push-in resistance thermometer, steam-tight, pressure-tight up to 5.0bar

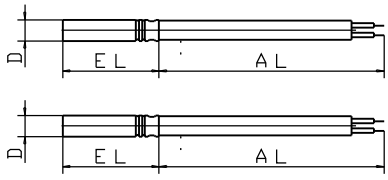

			(2) Operating temperature in °C
	x	302	-70 to +200°C / FEP connecting cable
x		370	-50 to +150°C / PTFE connecting cable
x		371	-50 to +150°C / silicone connecting cable
			(3) Measuring insert
x		1001	1 x Pt100 in 3-wire circuit
x		1003	1 x Pt100 in 2-wire circuit
x	x	1011	1 x Pt100 in 4-wire circuit
x		2001	2 x Pt100 in 3-wire circuit
x	x	2003	2 x Pt100 in 2-wire circuit
x	x	2011	2 x Pt100 in 4-wire circuit (not in conjunction with 371)
x		3028	3 x Pt100 1 x 2-wire circuit, 2 x 3-wire circuit (not in conjunction with 371)
			(4) Tolerance class to EN 60 751
x	x	2	Class A
			(5) Protection tube diameter D in mm
	x	4	4mm
	x	4.5	4.5mm with 2 measuring circuits in 4-wire circuit
x		6	6mm
			(6) Fitting length EL in mm (50 ≤ EL ≤ 500)
	x	50	50mm
x	x	100	100mm
x	x	150	150mm
x	x	200	200mm
x	x	...	please specify in plain text (in 50mm steps)
			(7) Connecting cable end
x	x	03	bare cable ends
x	x	11	ferrules to DIN 46 228 Part 4 (standard)
x		13	receptacle 6.3 to DIN 46 247
x	x	80	multipole connector (specify type in plain text)
			(8) Connecting cable length AL in mm (500 ≤ AL ≤ 500000)
x	x	2500	2500mm (standard)
x	x	...	please specify in plain text (in 500mm steps)
			(9) Extra codes
x	x	000	no extra code
	x	304	without protection tube (sensor enclosed in PTFE sleeve)
x	x	312	curved protection tube R 13mm (only 4.5mm dia. on Type 902830/30) (please specify dimensions in plain text)
x		317	shielded connecting cable

	(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)	
Order code		-		-		-		-		-		-		-		/		,...
Order example	902830/10	-	370	-	1011	-	2	-	6	-	100	-	11	-	2500	/	000[1]	

1. List extra codes in sequence, separated by commas.

Stock versions

(1)		(2)		(3)		(4)		(5)		(6)		(7)		(8)		(9)	Sales No.
902830/10	-	370	-	1011	-	2	-	6	-	100	-	11	-	2500	/	317	90/00306448
902830/10	-	370	-	2001	-	2	-	6	-	100	-	11	-	2500	/	000	90/00306449
902830/30	-	302	-	1011	-	2	-	4	-	50	-	11	-	2500	/	000	90/00445084
902830/30	-	302	-	2011	-	2	-	4.5	-	50	-	11	-	2500	/	000	90/00445085